

EuropeLIFT

optimize reaching


TR 18 GT



- working height: 18 m
- side reach: 10,5 m (100 kg)
- moment controls
- jib 1,3 m
- hydraulic platform rotator
- adjustable tracks in width and height
- massive alu basket with hand guardrail
- auto chassis level



Technical Data:	TR 18 GT
Working height:	18 m
Platform height:	16 m
Platform capacity (220kg)	8 m
Platform capacity (100kg)	10,5 m
Max. platform capacity	220 kg
Slewing	375°
Jib	1.3 m
Platform dimensions	1,4x0,7x1,1 m
Platform rotator	2x65°
Transport length	5,46 m
Transport length basket removed	4,85 m
Transport width narrow.	0,79 m
Transport height	1,99 m
Total weight	2450 kg
Outrigger footprint (in width, plate outer edge)	3,26 m
Gradeability	6,9 %
Energy chain	inside profiles

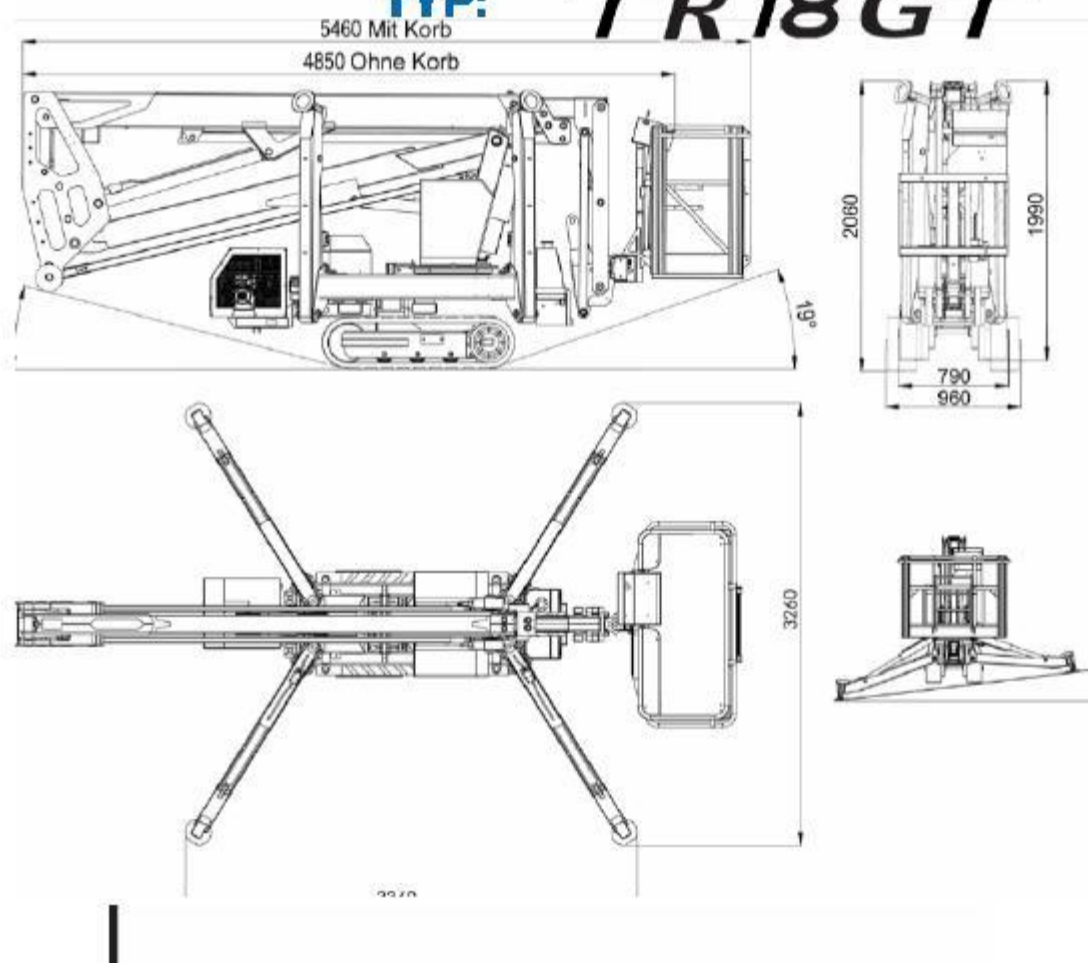

STANDARD FEATURES:

- working height : 18m
- side reach 10,5m (100kg)
- non marking tracks
- manual adjustable tracks in width and height
- hydraulic platform rotator
- auto chassis leveling
- aluminium basket with handguard rail and tool tray
- proportional electro-hydraulic controls by fingertip joysticks
- 230 V & Honda iGX390 power supply
- (electric motor speed control)
- cable remote controls for the tracks
- outrigger ground pressure sensors with accoustic and visual alarms
- ground and upper controls
- chassis level sensor 1° with accoustic alarm
- 230V socket in basket
- ground and upper controls with tarpaulin cover
- hourmeter
- manual emergency handpump
- machine colour RAL 3002 (red)
- 620 mm diamater slewing ring

OPTIONS

- outrigger plates
- air/water hose to platform
- flashing beacons on outriggers

