





G 5-7t G Series Internal Combustion Counterbalanced Forklift Truck



Characteristic				
1.01	manufacturer		HEU	
1.02	Model		CPCD50-DE1G	CPCD60-DE1G CPCD70-DE1G
1.03	Load Capacity	kg	5000	6000 7000
1.04	Load Centre	mm		600
1.05	Power Type		Diesel fuel / Diesel	
1.06	Driving style		Seat-type	
1.07	Front Tire		8.25-15-14PR	
Dimension Parameter				
2.01	Lifting Height(standard)	H mm	3000	
2.02	Mast Tilt(fwd/bwd)	α/β deg	6/12	
2.03	Min.Turning Radius	Wa mm	3240	3300 3370
2.04	Overall Length(with Forks)	L mm	4710	4790 4840
2.05	Overall Width	W1 mm	2045	
2.06	Overall Height(mast without activity)	H4 mm	2450	
2.07	Wheel Base	L1 mm	2300	2300 2300
2.08	Tread(fwd/bwd)	W3/W4 mm	1520/1700	
2.09	Overhang(fwd/bwd)	L2/L4 mm	590/600	595/675 600/720
2.10	Min.Under clearance	H5 mm	200	200 200
2.11	Lateral Fork Adjustment(Outside of Forks)	W5 mm	300/1845	
2.12	Fork Length	L3 mm	1220	
2.13	Fork Width/Thickness	W/T mm	55/150	60/150 65/150
Performance Parameter				
3.01	Lifting Speed(Loaded/Unloaded)	mm/s	470/520	430/520 395/520
3.02	Lowing Speed	mm/s	WITHOUT LOAD≥300 WITH FULL LOAD≤600	
3.03	Traveling Speed(Loaded/Unloaded)	km/h	22/25	
3.04	Max.Gradeability	%	36/19	34/19 33/19
Engine and Gearbox				
4.01	Engine Manufacturer/Model		Deutz TCD 3.6 L04	
4.02	Cyl. Number/Displacement	/L	4/3.6	
4.03	Rated Power/Rated	kW/rpm	55.4/2200	
4.04	Max. Torque/Rated	Nm/rpm	390/1300	
4.05	Gearbox		Intelligent gear shifting	

— CPCD50 — CPCD60 — CPCD70

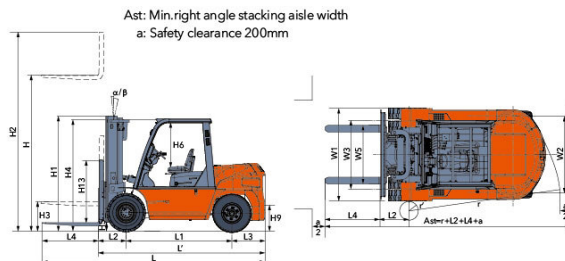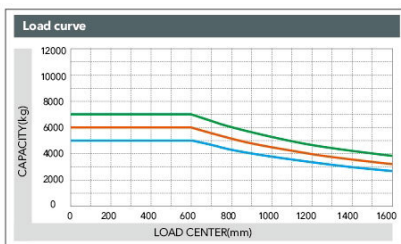

Ast: Min. right angle stacking aisle width
a: Safety clearance 200mm



HELI 安徽合力股份有限公司
ANHUI HELI CO., LTD.

ADD: NO.668 Fangxing Street Economical
Development Zone, Hefei, P.R. China
TEL: (86 551) 63639068, 63639258, 63639358, 63662105
FAX: (86 551) 63639966
WEBSITE: <http://www.helichina.net>

AUTHORIZED DEALER

2016 heli copyright
Catalog No.2016-03 HELI Print

* Our products are subject to improvements and changes without notice.

G series / INTELLIGENT
ENVIRONMENT-FRIENDLY



5-7t G Series Internal Combustion Counterbalanced Forklift Truck



TCD3.6

HELI
LIFTING THE FUTURE



TOP1 FORKLIFT MANUFACTURER AND SALER
IN CHINA FOR CONSECUTIVE 25 YEARS



>> FEATURES OF THE COMPLETED TRUCK



DAMPING

- > With suspension damping structure on overhead guard(cab) and optimized design for the transmission, the whole trucks's vibration reduced a lot and relieve driver's fatigue greatly.



ENERGY EFFICIENCY

- > With optimized hydraulic system, the truck is more energy-efficient and lower fuel consumption.

HEAT DISSIPATION




- > With the optimized cooling system and great cooling performance, highly improved the reliability and durability of many key parts such as transmission and engine, etc.

RELIABILITY

- > Key parts like frame and mast apply CAE top-down design to improve their strength and make the truck tough.

COMFORT

- > Man-machine engineering design improves operation comfort; wide view lifting system improves vision;lower buffering (standard)

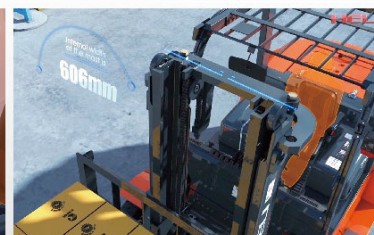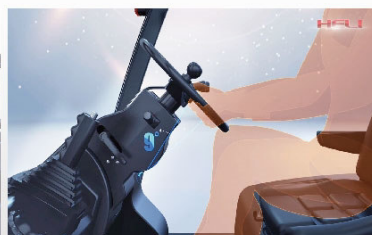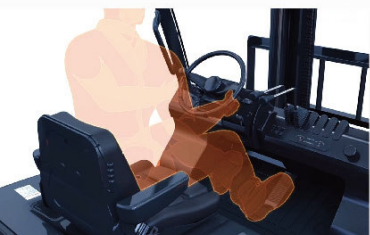

INTELLIGENT GEAR SHIFTING

- > With electronic-hydraulic reversing system as standard configuration, make operation more convenient and easy; The updated new intelligent gear shifting system could avoid starting with second gear, improves the transmission box's reliability.



MAINTAINABILITY

- > Independent integral electric control box reduces electric fault and is easy for maintenance;Engine hood open angle is enlarged to 80°and is convenient for repair.



Reliable output

- > German made diesel engine, quality of first class.
- > Maintenance free "DOC only" exhaust afterment, result in low maintenance cost and better machine availability
- > Best cold performance(-30℃ with DEUTZ preheat system) ensures reliable operation under extreme condition.

Best in class performance

- > Powerful DEUTZ Common Rail (DCR) injection system and electronic engine control (EMR4) ensure maximum engine performance at low fuel cost
- > High torque output(390Nm@1300rpm) tailor made for forklift application

Cost saving

- > 500h oil change interval and a maintenance free valve train result in low maintenance cost and increase machine availability
- > Oil consumption rate

Clean power

- > Meet the requirement of EU Stage IIIB/ EPA Tier 4F emission standard.
- > Future-proof, Stage V ready.



ENGINE INFORMATION

Engine type		Deutz TCD 3.6 L04
Cyl. Number/Displacement	/L	4/3.6
Bore/stroke	mm	98/120
Rated Power/ Speed	kW/rpm	55.4/2200
Max. Torque/ Speed	Nm/rpm	390/1300
Minimum idling speed	rpm	800
Specific fuel consumption	g/kWh	209
Weight as per DIN 70020 Part 7A	kg	350